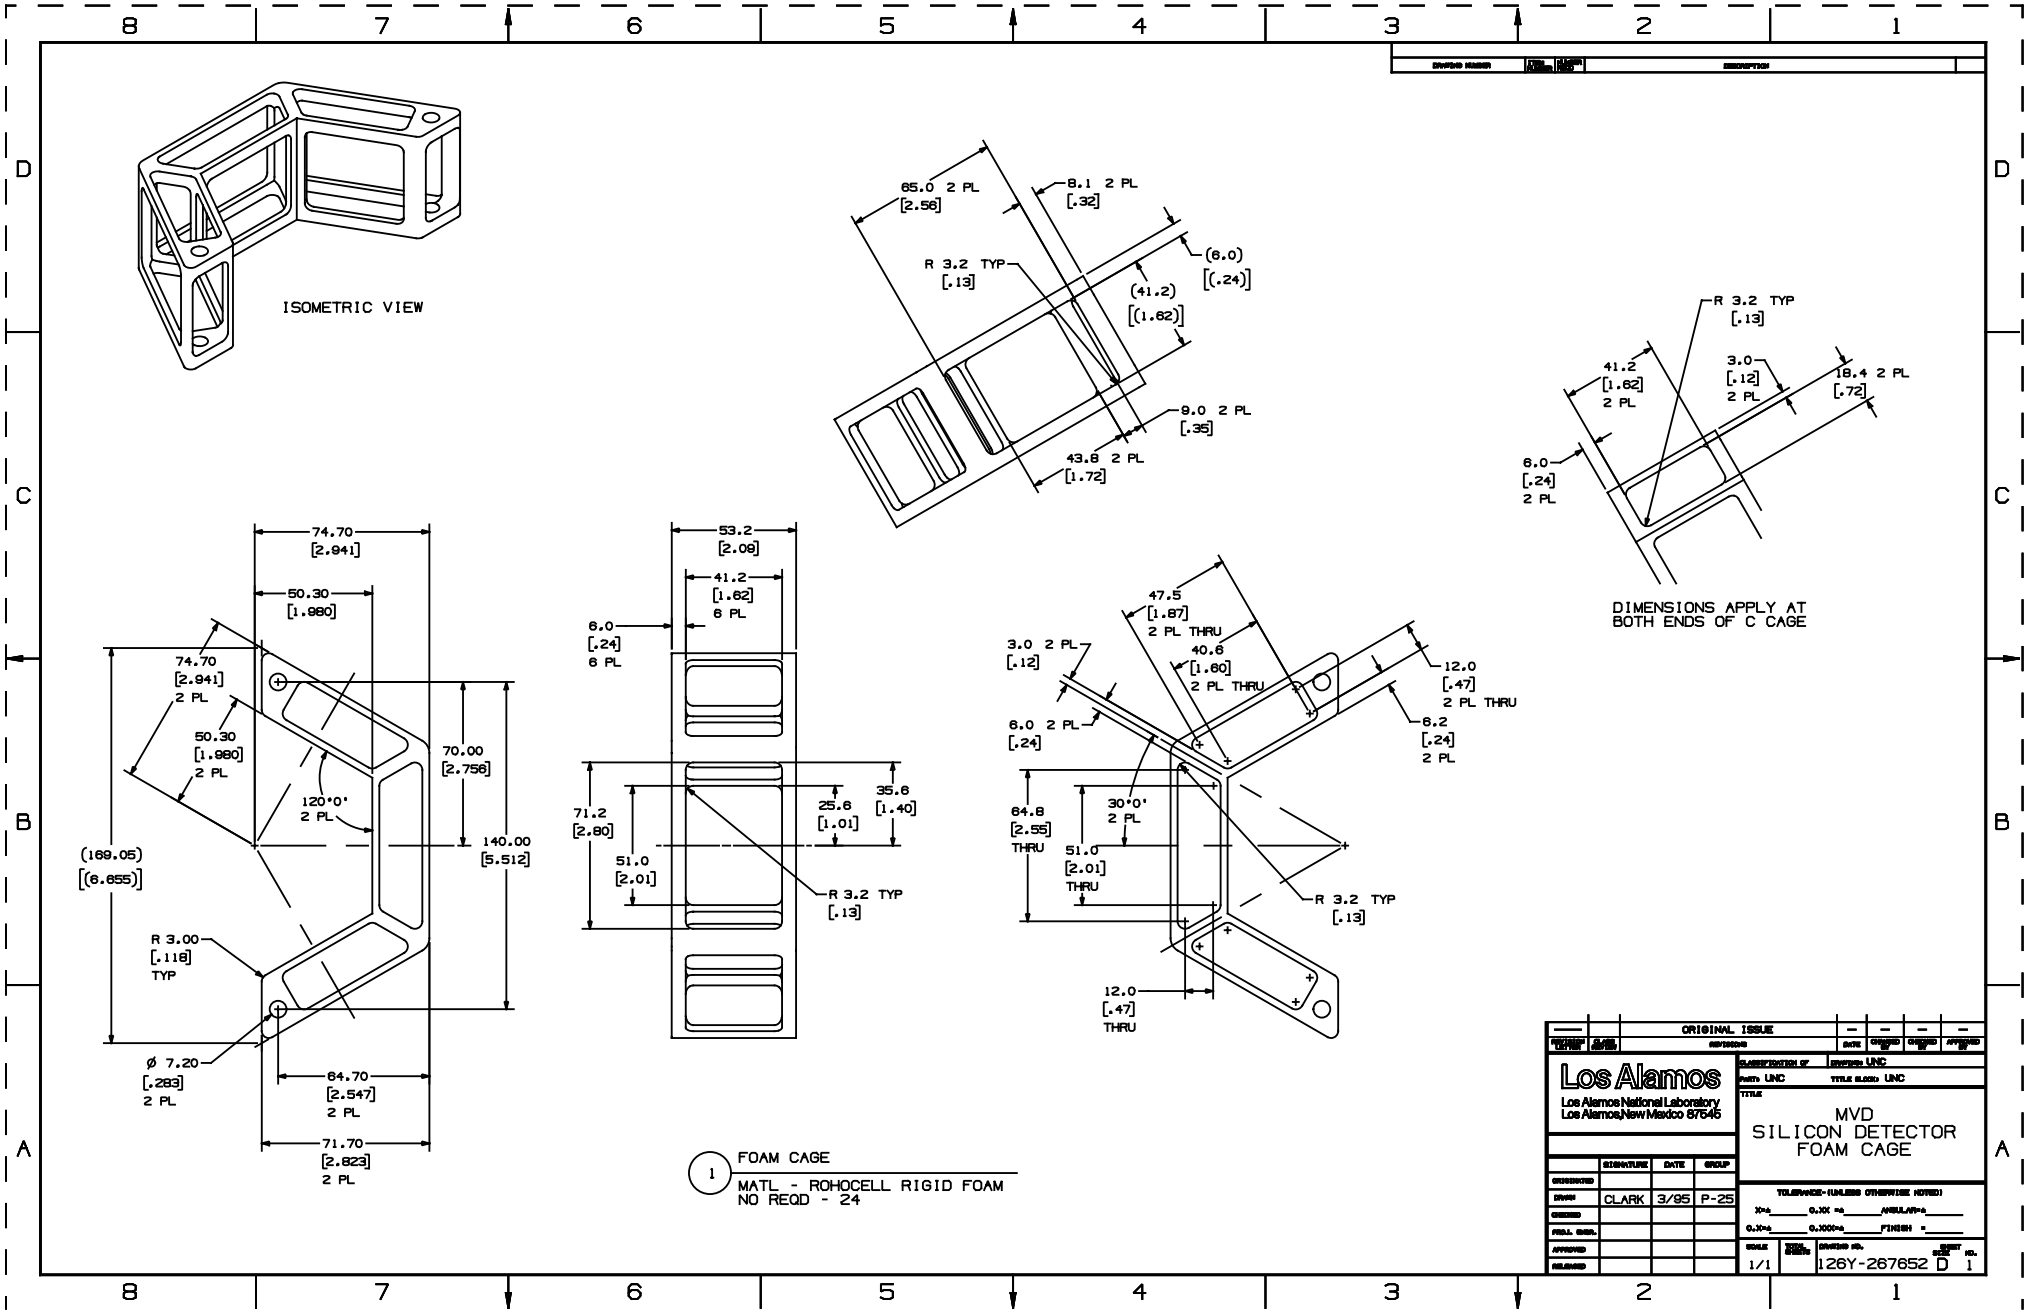
ISOMETRIC VIEW
65.0 2 PL [2.56]
8.1 2 PL [.32]
R 3.2 TYP [.13]
(6.0) [(.24)]
(41.2) [(1.62)]
9.0 2 PL [.35]
43.8 2 PL [1.72]
R 3.2 TYP [.13]
41.2 [1.62] 2 PL
3.0 [.12] 2 PL
18.4 2 PL [.72]
6.0 [.24] 2 PL
DIMENSIONS APPLY AT BOTH ENDS OF C CAGE
74.70 [2.941]
50.30 [1.980]
74.70 [2.941] 2 PL
50.30 [1.980] 2 PL
120°0' 2 PL
70.00 [2.756]
140.00 [5.512]
(169.05) [(6.655)]
R 3.00 [.118] TYP
Ø 7.20 [.283] 2 PL
64.70 [2.547] 2 PL
71.70 [2.823] 2 PL
53.2 [2.09]
41.2 [1.62] 6 PL
6.0 [.24] 6 PL
71.2 [2.80]
51.0 [2.01]
25.6 [1.01]
35.6 [1.40]
R 3.2 TYP [.13]
47.5 [1.87] 2 PL THRU
40.6 [1.60] 2 PL THRU
3.0 2 PL [.12]
6.0 2 PL [.24]
12.0 [.47] 2 PL THRU
6.2 [.24] 2 PL
64.8 [2.55] THRU
30°0' 2 PL
51.0 [2.01] THRU
R 3.2 TYP [.13]
12.0 [.47] THRU
1 FOAM CAGE
MATL - ROHOCELL RIGID FOAM
NO REQD - 24
ORIGINAL ISSUE
Los Alamos
Los Alamos National Laboratory
Los Alamos, New Mexico 87545
CLASSIFICATION OF
DRAWING: UNC
PART: UNC
TITLE BLOCK: UNC
TITLE
MVD
SILICON DETECTOR
FOAM CAGE
SIGNATURE
DATE
GROUP
DRAWN
CLARK
3/95
P-25
TOLERANCE-(UNLESS OTHERWISE NOTED)
SCALE
1/1
DRAWING NO.
126Y-267652
SHEET SIZE
D
NO.
1